



VVUÚ, a. s.

Ostrava - Radvanice, Pikartská 1337/7, PSČ 716 07

zapsaná v obchodním rejstříku vedeném Krajským soudem v Ostravě, oddíl B, vložka 315

IČ: 45193380; DIČ: CZ45193380

Zkušebnictví, AO 214, NB 1019, Certifikace výrobků, Certifikace SMJ, SMBOZP, EMS, Inspekční činnost, Strojírenská výroba, Obchod
Notified Body 1019

EC type-examination certificate

according to Article 4 of the Government Order No. 21/2003 and according to Article 10 of the Directive 89/686/EEC (PPE) as amended by Directive 93/68/EEC, 93/95/EEC and 96/58/EC

No.: 1019-168/Q/2012

Manufacturer: **PROTECCIONES CLIMAX, S.A.**
Pol. Ind. Sector Mollet C/A No. 3
08150 Parets del Vallès
Spain

Product: **OTTO** (category III/PPE)

Type: **Fall Arrester**

VVUÚ, a. s. hereby certifies, that the product sample above mentioned complies with the relevant basic health and safety requirements specified in Annex 2 of the Government Order No. 21/2003 and in Annex II the Directive 89/686/EEC as amended by Directive 93/68/EEC, 93/95/EEC and 96/58/EC.

The assessment and testing of specimen of the products prove conformity with harmonised standards: ČSN EN 353-2:2003 (identical to EN 353-2:2002) and ČSN EN 365:2005 (identical to EN 365:2004).

The examination and test results are given in Final Report No. 1019-016766/2012 which is an integral part of the certificate.

Marking and instruction for use were assessed in English version.

Validity of this certificate is limited to July 31, 2017.

2012-07-31
Date



Ing. Tomáš Dorazil
Deputy Director NB 1019

VVUÚ, a.s., in Ostrava – Radvanice, notified body (ID-Nr. 1019) according of the Government Order No. 21/2003

VVUÚ, a.s., Pikartská 1337/7

Tel./Phone: +420 596 252 111, 268

e-mail: cov@vuuu.cz

716 07 Ostrava – Radvanice, Czech Republic

Fax: +420 596 252 147

http://www.vuuu.cz

FA09 2006-02-06


Page 1/2

1019-168-Q-2012

Description of product

The product „OTTO, type Fall Arrester“ is used for arresting of user's fall. Guided type fall arrester is self-locking and moves along flexible anchor line (low stretch kernmantel rope according to EN 1891, diameters of 11 mm and 12 mm). Fall arrester follows a user during upwards or downwards movement and locks automatically when user's fall occurs.

Picture of product

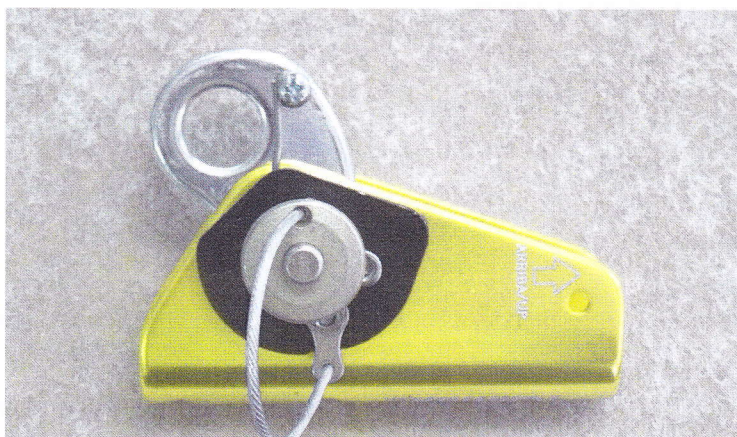

Duplication of this document in parts is subjected to the approval by VVUÚ, a. s., NB 1019, in Ostrava – Radvanice, Czech Republic.