

LLAVES FIJAS - MM




Designación :

- ISO 691 - ISO 1711-1 - ISO 3318 - ISO 10102 - DIN 3110
- Cabeza fija orientada a 15° con respecto al eje del mango (ángulo de recuperación 30°).
- Forjadas a partir de acero al cromo vanadio.
- Acabado : cromado brillante.

Acondicionamiento :

1

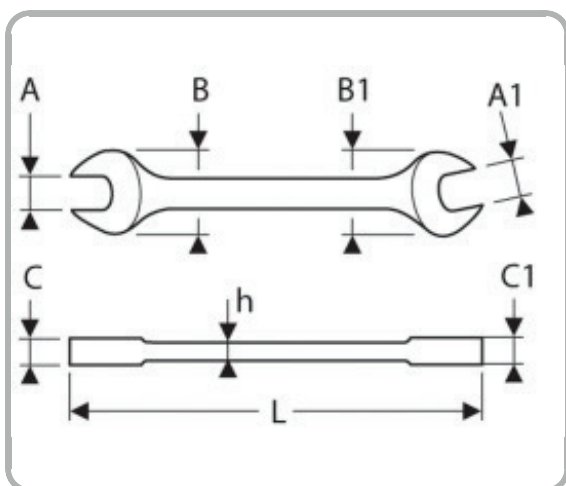

Referencias :

	EAN	A1 [mm]	A [mm]	B [mm]	B1 [mm]	C [mm]	C1 [mm]	H1 [mm]	L [mm]	[g]
E111201	3258951112014	26	24	50.4	55.9	8	8	55	266	318
E111202	3258951112021	46	41	85	94	14.7	14.7	92	415	1450
E111203	3258951112038	50	46	94	103	15.7	15.7	107	465	1767
E113250	3258951132500	7	6	16	18	3.3	3.3	23	122	20
E113251	3258951132517	9	8	20	22	3.6	3.6	25	140	32
E113252	3258951132524	11	10	23.4	25.4	4	4	30	156	47
E113253	3258951132531	13	12	27.2	28.4	5	5	34	172	63
E113254	3258951132548	15	14	31.4	33.9	5.6	5.6	38	188	92

<u>E113255</u>	3258951132555	17	16	35.9	38	6.1	6.1	43	204	118
<u>E113256</u>	3258951132562	19	18	38.4	41.9	6.5	6.5	48	220	146
<u>E113257</u>	3258951132579	22	20	42	45.9	7.2	7.2	49	234	200
<u>E113258</u>	3258951132586	23	21	45.2	48.4	7.5	7.5	49	247	220
<u>E113259</u>	3258951132593	27	24	50.4	55.9	8	8	55	266	375
<u>E113260</u>	3258951132609	28	25	53.4	61.9	8.4	8.4	59	285	377
<u>E113261</u>	3258951132616	28	26	53.4	61.9	8.4	8.4	59	285	456
<u>E113262</u>	3258951132623	5	4	12.5	14.5	3.2	3.2	20	112	15
<u>E113265</u>	3258951132654	10	8	20	22	3.6	3.6	25	140	32
<u>E113267</u>	3258951132678	13	10	25.8	28.4	5	5	34	172	62
<u>E113268</u>	3258951132685	13	11	27.2	28.4	5	5	34	172	62
<u>E113272</u>	3258951132722	17	13	31.4	33.9	5.6	5.6	38	188	88
<u>E113275</u>	3258951132753	19	17	38.4	41.9	6.5	6.5	48	220	158
<u>E113279</u>	3258951132791	24	22	45.2	48.4	7.5	7.5	49	247	234
<u>E113281</u>	3258951132814	29	27	58.3	62.7	9.1	9.1	62	302	456
<u>E113282</u>	3258951132821	30	27	58.3	62.7	9.1	9.1	62	302	481
<u>E113285</u>	3258951132852	35	33	64	78	10	10	70	319	612
<u>E113286</u>	3258951132869	41	36	74.3	85.4	12.2	12.2	83	380	918
<u>E113287</u>	3258951132876	36	34	64	78	10	10	70	319	918
<u>E113288</u>	3258951132883	42	38	74.3	85.4	12.2	12.2	83	380	918
<u>E113909</u>	3258951139097	32	30	59.9	64	9.1	9.1	62	302	600