




UH26

DETAILS



Width	120 mm (4 3/4 in)
Thickness	62 mm (2 7/16 in)
Weight	2.733 kg/m (1.84 lb/ft)
Internal Dimensions	51 x 51 mm (2 x 2 in)



DESCRIPTION

When you want that clean modern appearance – those simple design elements that create “the look” you want, NewTechWood screens and partitions, stylistic statements that set your home apart without adding to all that maintenance.

CHARACTERISTICS



UltraShield
Coating Layer



Environmentally
Friendly



Internationally
Tested



Low
Maintenance



Mold/Mildew
Resistance



UV
Protection



NewTechWood

SCREEN & PARTITION CLADDING

TESTS

Property	Test Method	Test results
Abrasion Resistance	ASTM D4060	33mg (1000cycles)
UV Weathering Test	ASTM G154	After 3000 hours test, Grey Scale3, $\Delta E^* = 3.56$
Boiling Test	EN15534	Water absorption in weight: 0.49%
Bond Strength	EN319	Average Bond Strength > 2.3MPa No obvious abruption and damage after test
Coefficient of Linear Thermal Expansion	ASTM D696-16	Mean value: 37.9×10^{-6} mm/mm/°C

* For more information check our website: www.newtechwood.com

ACCESSORIES

End Cap

Material: Plastic
The end cap is used at the end of UH26 as a covering for the hollow chambers.




K-33

Material: #201 Steel
K-33 is used as a connecting mechanism between the joist and the decorative profile



COLORS

SAND	CEDAR	MAPLE	RED CEDAR	OAK	
TEAK	MAHOGANY	IPE	REDWOOD	WALNUT	MERBAU
ANTIQUE	SMOKE WHITE	MIRAGE GRAY	SILVER GRAY	LIGHT GRAY	EBONY

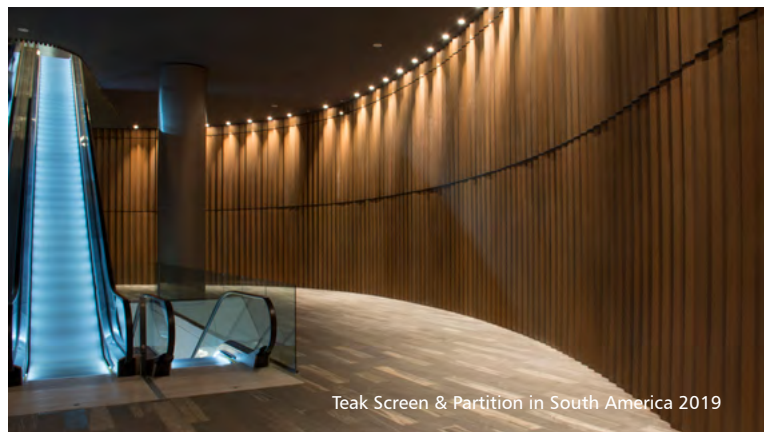

Teak Screen & Partition in South America 2019